


factair

Safe Air Cabinets

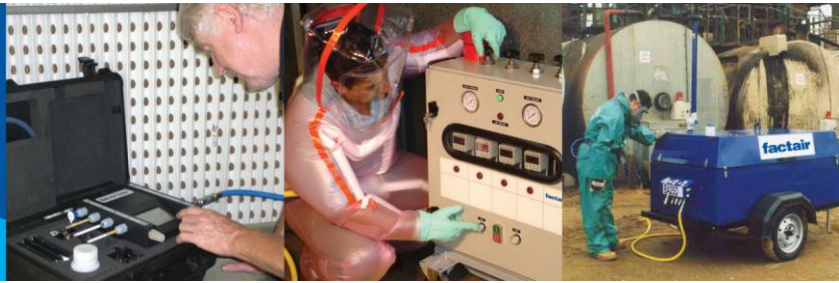

Factair's Safe-Air Cabinets provide high quality breathing-air by filtration from a normal compressed-air supply. Designed to be fitted to standard factory air lines or mobile compressors with aftercoolers the filtration system removes liquid and solid particulate down to a size of 0.01 micron and then oil vapour and odour down to 0.003 p.p.m (exceeding the criteria laid down in BS EN 12021).

Mounted in durable, impact resistant polyethylene housings the Safe-Air Cabinets can be used in the most hazardous and hard working environments and are available in wall mounted or portable free standing options.


The Safe-Air Cabinets are available in 2 different output sizes either 707 l/min from up to 3 outlets or 990 l/min from up to 5. As standard the Safe-Air Cabinets are provided with a pre-filter, coalescing and carbon filters. Each unit is fitted with a pressure regulator, pressure gauge and automatic condensate collection. The breathing-air outlet pressure is set using an adjusting key and the pressure gauge incorporates the correct operating parameters for both positive pressure and constant flow masks, in accordance with the requirements of BS EN 14594.

The wall mounted version of the Safe-Air Cabinet incorporates the outlet connection manifold on the bottom of the unit. This ensures that users can operate on either side and to the front of the cabinet reducing the potential for hoses to be kinked and distorted. The portable version is fitted with a carry frame to allow the unit to be used on rough or uneven terrain, on this version, to prevent the outlet connections being damaged they are mounted on the right hand side.



SAC700HD Wall Mounted

Pictured with 2 CEJN compatible sockets fitted and connected to 2 SAH10-30 Breathing-Air

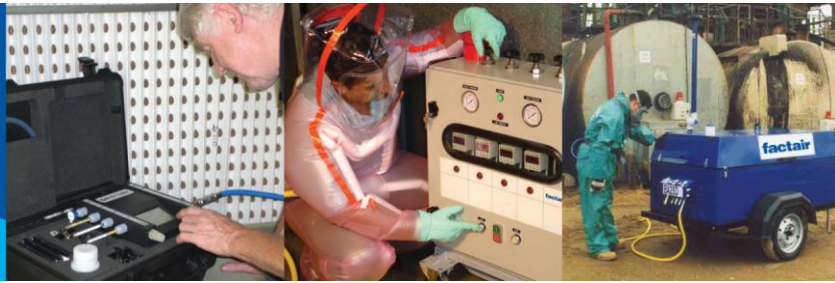

SAC700HD

Pictured with 2 CEJN compatible sockets fitted



SAC950HDP

Pictured with 5 CEJN compatible sockets fitted



| Model | Capacity (l/min) | Pre-filter | Coalescing filter | Activated Carbon filter | Max Inlet Pressure (bar) | Max Outlets | Dims (mm) | | Weight (kg) |
|----------|------------------|------------|-------------------|-------------------------|--------------------------|-------------|------------------------|------------------------|-------------|
| | | | | | | | Wall Mounted Version | Portable Version | |
| SAC700HD | 707 | ✓ | ✓ | ✓ | 16 | 3 | 470 High x | 535 High x | 5.0 |
| SAC950HD | 990 | ✓ | ✓ | ✓ | 16 | 5 | 280 Wide x 162 Deep | 400 Wide x 210 Deep | 5.5 |

Additional Options

- ❑ For the portable carry frame option add the suffix P to the model reference and 1 kg to the weight.
- ❑ For an intrinsically safe low pressure warning whistle add the suffix W.
- ❑ For a battery powered low pressure audible and visual alarm, add the suffix A.